




# **EH2-UFO high bay**

**Model : 9< &!UFO100W**

**9< &!UFO150W**

**9< &-UFO200W**

# I. Product pictures

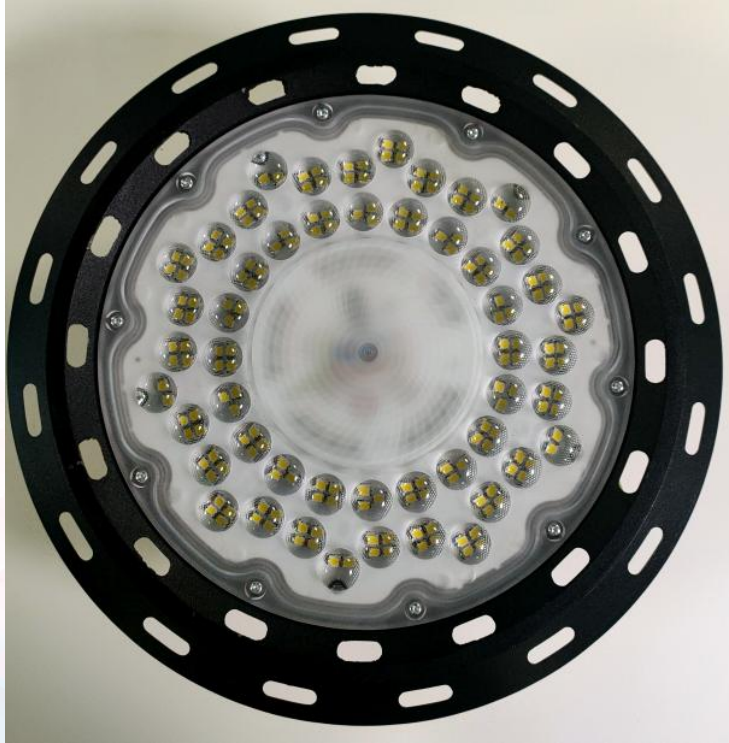

## II. Product application



High efficiency UFO high bay, the elegant shape, neoteric structure, environmental protection, all these features make it to be the most ideal product for industrial lighting. The light can be widely used in workshop, stadium, factory, warehouse, highway toll station, petrol station, supermarket, mine and other industrial lighting places.

# III. Product parameters


Model Number	Size(mm)	Power	Input Voltage	LED Type	Luminous Efficiency	Beam Angle
EH2-UFO100W	∅ 250X105	100W	200-265V	2835(144PCS)	110LM/W	90°
EH2-UFO150W	∅ 306X105	150W	200-265V	2835(180PCS)	110LM/W	90°
EH2-UFO200W	∅ 360X105	200W	200-265V	2835(288PCS)	110LM/W	90°

Color Temperature	4000K/6000K
Input Voltage	200-265V
Power Factor	>0.9
Surge immunity	4KV
LED Type	2835
CRI	Ra85
Operating Temperature	-20°C~+45°C
IP Rating	IP65
Efficiency	>95%
Warranty	2 years

## Features:

- 1.ADC12 die-casting aluminum. Big heat radiating area.
- 2.It adopts high thermal conductivity and high insulation aluminum pcb, with withstand voltage of 2500V and creepage distance of 5.0mm。
3. Famous brand IC and constant power scheme are adopted. Stable performance and withstand 4KV surge
4. Combined with LED performance, professional circuit design, led low current use to ensure product lifespan
5. Environmental protection. Zero pollution, no ultraviolet radiation, without infrared

# V. Product size

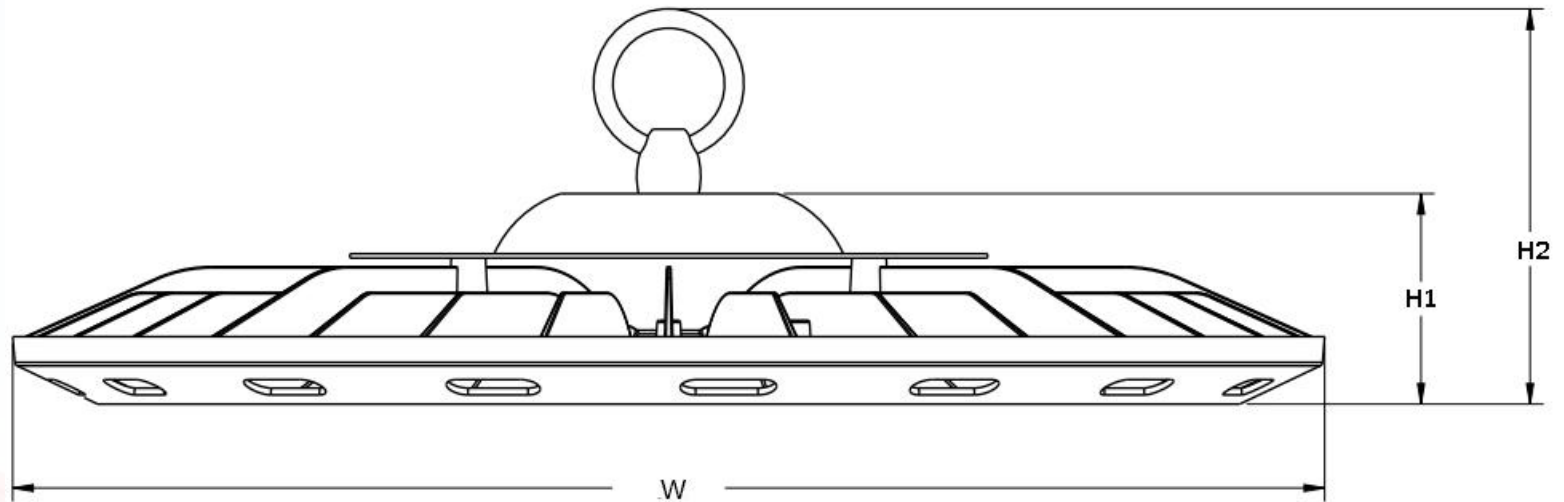

	W	H1	H2
100W	φ 250	60	105
150W	φ 306	60	105
200W	φ 360	60	105

unit:mm

# VI. Packing info

Model	Carton Size(mm)	Q'ty/CTN	NW/GW
100W	265*265*150	1piece/Carton	1.2 Kg
150W	315*315*150	1piece/Carton	1.8Kg
200W	370*370*150	1piece/Carton	2.3Kg

